



40M 2 Core OM3 multimode LC-LC pulling eye Pre-Terminated fibre optic patch cord /pigtail Cable

Our Product Introduction

for more products please visit us on polyknitfabric.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: DYS/OEM
- Certification: ISO9001
- Model Number: LC/UPC -MU/UPC
- Minimum Order Quantity: 2 pieces
- Price: \$9.50 - \$39.00/pieces
- Packaging Details: Individual box or according to customer's request
- Supply Ability: 20000 Piece/Pieces per Day



Product Specification

- Type: Fiber Optic Patch Cord
- Use: FTTH
- Product Type: Fiber Optic LC Patch Cord
- Connector Type: LC
- Type: UPC
- Fiber Count: 2
- Cable Jacket: PVC , OFNP,OFNR
- Fiber Brand: Corning, YOFC, OFS
- Length: Customized
- Application: FTTH FTTB FTTH Network
- Port: Shenzhen



More Images



Product Description

Product Description

40M 2 Core OM3 multimode LC-LC pulling eye Pre-Terminated fibre optic patch cord /pigtail Cable

DYS has been providing high-quality pre-terminated cables for indoor and/or outdoor applications, with fanout number ranging from 12 to 144. Available connector types include MPO, SC, LC, FC, LSH, and MU, available fanout kits include steel-tube type, round type, box type, barrel type, etc., and available fanout types include bare fiber, 0.9mm, 1.2mm, 2.0mm, 3.0mm, etc. The fanout length can be up to 10 meters, and the fanout tolerance can be as small as 0.5cm. Our indoor/outdoor non-armored Pre-Terminated Fiber Optic Cable Assemblies are great choices for multiple applications inside or outside. For those jobs outside, consider our outdoor non-armored Pre-Terminated Fiber Optic Cable Assemblies for aerial or burial in duct applications. If you're facing the most extreme conditions, check out our outdoor armored direct burial/aerial and ADSS self-supporting aerial Pre-Terminated Fiber Optic Cable Assemblies. They will provide outstanding service and durability in all kinds of conditions. All of our pre-terminated cable products are tailor-made to customers' specific requirements. We can fulfill any kinds of customers' demands on products' specs including connector type, fanout type, fanout length/tolerance, cable structure, etc., for a wide range of applications including FTTC, FTTB, FTTH, FTTA, data center, industrial, robotic, health-care fields, etc.

APPLICATIONS

Connected with trunk cables on one end, equipment port on the other end.

Connected with transfer modules on one end, equipment port on the other end.

FEATURES

100% pre-terminated and tested in factory to ensure transfer performance

Rapid configuration and networking, reduce installation time

Our Product Introduction


for more products please visit us on polyknitfabric.com

Supports 40G and 100G network applications

Jacket material: LSZH, OFNR, OFNP available

Supports up to 12F, 24F, 48F, 72F, 96F, 144F, customized products are available



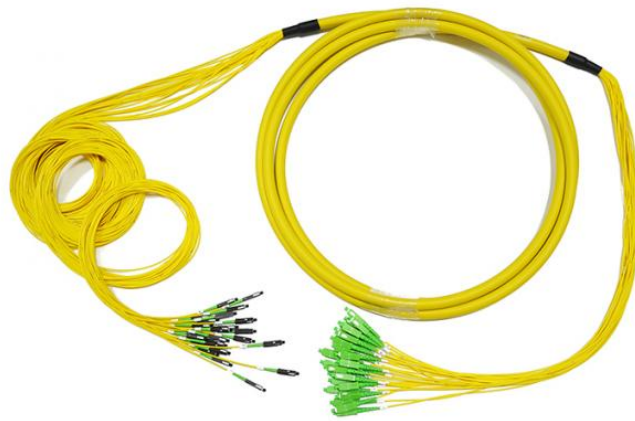

Performance Level			Standard	Elite		
Connector	Mode	Endface	IL(max) (dB)	RL(min) (dB)	IL(max) (dB)	RL(min) (dB)
LC/SC/FC/ST	SM	APC	≤0.30	≥60	≤0.20	≥65
		UPC	≤0.20	≥50	≤0.10	≥50
	MM	PC	≤0.20	≥30	≤0.10	≥30
Mechanical Properties						
Item			Criteria	Conformance		
ΔIL After 50 Matings	MPO/MTP		≤0.3dB	GR-1435		
ΔIL After 500 Matings	LC/SC/FC/ST		≤0.2dB	IEC 61300-2-2		
Min Bend Radius (Dynamic)			20*OD (Cable Diameter)			
Min Bend Radius (Static)			15*OD (Cable Diameter)			
Environment Conditions						
Item			Criteria	Conformance		
Operation Temperature			-40~60°C	IEC 61753-1		
Storage Temperature			-45~85°C			



Multi-Core(Pre-Term)Fiber Optic Patch Cord



Armoured Fiber Optic Patch Cord



Main Products



Product inquiry

Send us inquiry, you will get full catalog.



Our Company

DYS CERTIFICATE

- 1 One-stop Solution Service
- 2 Products made by DYS' own factory with competitive price, good quality and fast delivery time


Reliability Testing Laboratory

Laboratory

- Manual Image Measuring Machine
- Automatic Insertion Force Testing Machine
- Tensile Testing Machine
- High Low Temperature Circulating Machine
- IPAD Pressure Water Immersion Testing Machine
- Fiber Bending and Torsion Testing Machine
- Salt Spray Testing Machine
- Collision Testing Machine
- Three Directions Vibration Test Machine



COMPANY PROFILE

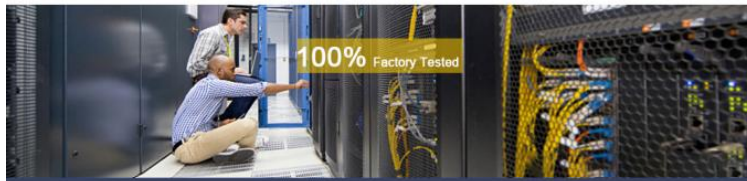

OUR EXHIBITIONS



PACKING & DELIVERY



Sample
Within 1-2 working days

Wholesale orders
3-7 working days according various quantities

FAQ

1. How many staffs we have?
Answer: About 250 well-trained staff and engineers.
2. When our company be established?
Answer: We started from year 2008.
3. What's our main products?
Answer: DYS dedicates to the developing, production, marketing of the Fiber Optic Cable, Indoor/Outdoor Patch Cord, Splitter, Adapter, Attenuator, and so on.
4. What is the area of the factory?
Over 5000 square meters
More than 30 non dust productions lines in total
5 production lines for Fiber Optic Cable
2 high standard MPO/MTP Jumper assembly lines
15 production lines for standard Jumper
8 PLC Psplitter production lines
5. What certificate we have?
Answer: ISO 9001, 2015, RoSH, CE, High and New Tech Enterprise Certificate.

Product inquiry

Send us inquiry, you will get full catalog.



